


### Cortical screw 1.5 mm, self-tapping

Thread diameter	1.5 mm
Core diameter	1.0 mm
Head diameter	3.0 mm
Pitch	0.5 mm
Hex width	1.5 mm
Material:	titanium alloy or steel




Spiral drill:	99010-11045 (3faceted) 99020-11060 (QC)
Tap drill:	99100-01001 (dental QC)
Screwdriver:	99160-15115

L	Cat. No steel	Cat. No titanium alloy
6 mm	11001-15006	31001-15006
7 mm	11001-15007	31001-15007
8 mm	11001-15008	31001-15008
9 mm	11001-15009	31001-15009
10 mm	11001-15010	31001-15010
11 mm	11001-15011	31001-15011
12 mm	11001-15012	31001-15012
14 mm	11001-15014	31001-15014
16 mm	11001-15016	31001-15016
18 mm	11001-15018	31001-15018
20 mm	11001-15020	31001-15020
22 mm	11001-15022	31001-15022

Non self tapping version is also available.

### Cortical screw 2.0 mm, self-tapping

Thread diameter	2.0 mm
Core diameter	1.3 mm
Head diameter	4.0 mm
Pitch	0.6 mm
Hex width	1.5 mm
Material:	steel or titanium alloy



Spiral drill:	99010-15070 (3faceted) 99020-15085 (QC)
Tap drill:	99100-01002 (dental QC)
Screwdriver:	99160-15115


L	Cat. No steel	Cat. No titanium alloy
6 mm	11001-20006	31001-20006
8 mm	11001-20008	31001-20008
10 mm	11001-20010	31001-20010
12 mm	11001-20012	31001-20012
14 mm	11001-20014	31001-20014
16 mm	11001-20016	31001-20016
18 mm	11001-20018	31001-20018
20 mm	11001-20020	31001-20020
22 mm	11001-20022	31001-20022
24 mm	11001-20024	31001-20024
26 mm	11001-20026	31001-20026
28 mm	11001-20028	31001-20028
30 mm	11001-20030	31001-20030
32 mm	11001-20032	31001-20032
34 mm	11001-20034	31001-20034
36 mm	11001-20036	31001-20036
38 mm	11001-20038	31001-20038
40 mm	11001-20040	31001-20040

Non self tapping version is also available.

## Solid screws

### Cortical screw 2.7 mm, self-tapping

Thread diameter	2.7 mm
Core diameter	1.9 mm
Head diameter	5.0 mm
Pitch	1.0 mm
Hex width	2.5 mm
Material:	steel or titanium alloy



Spiral drill:	99010-20115 (3 faceted) 99020-20125 (quick coupling)
Tap drill:	99100-01003 (quick coupling)
Screwdriver:	99160-25120

**Non self tapping version is also available.**

L	Cat. No steel	Cat. No titanium alloy
6 mm	11001-27006	31001-27006
8 mm	11001-27008	31001-27008
10 mm	11001-27010	31001-27010
12 mm	11001-27012	31001-27012
14 mm	11001-27014	31001-27014
16 mm	11001-27016	31001-27016
18 mm	11001-27018	31001-27018
20 mm	11001-27020	31001-27020
22 mm	11001-27022	31001-27022
24 mm	11001-27024	31001-27024
26 mm	11001-27026	31001-27026
28 mm	11001-27028	31001-27028
30 mm	11001-27030	31001-27030
32 mm	11001-27032	31001-27032
34 mm	11001-27034	31001-27034
36 mm	11001-27036	31001-27036
38 mm	11001-27038	31001-27038
40 mm	11001-27040	31001-27040
42 mm	11001-27042	31001-27042
44 mm	11001-27044	31001-27044

### Cortical screw 3,5/1,75 mm, self-tapping

Thread diameter	3,5 mm
Core diameter	2,0 mm
Head diameter	6,0 mm
Pitch	1,75 mm
Hex width	2,5 mm
Material:	steel or titanium alloy




Spiral drill:	99010-20115 (3 faceted) 99020-20125 (quick coupling)
Tap drill:	99100-01006 (quick coupling)
Screwdriver:	99160-25120

L	Cat. No steel	Cat. No titanium alloy
8 mm	11000-35008	31000-35008
10 mm	11000-35010	31000-35010
12 mm	11000-35012	31000-35012
14 mm	11000-35014	31000-35014
16 mm	11000-35016	31000-35016
18 mm	11000-35018	31000-35018
20 mm	11000-35020	31000-35020
22 mm	11000-35022	31000-35022
24 mm	11000-35024	31000-35024
26 mm	11000-35026	31000-35026
28 mm	11000-35028	31000-35028
30 mm	11000-35030	31000-35030
32 mm	11000-35032	31000-35032
34 mm	11000-35034	31000-35034
36 mm	11000-35036	31000-35036
38 mm	11000-35038	31000-35038
40 mm	11000-35040	31000-35040
45 mm	11000-35045	31000-35045
50 mm	11000-35050	31000-35050
55 mm	11000-35055	31000-35055
60 mm	11000-35060	31000-35060
65 mm	11000-35065	31000-35065
70 mm	11000-35070	31000-35070

Cortical screw 3.5/1.25 mm,  
self-tapping

Thread diameter 3.5 mm  
 Core diameter 2.4 mm  
 Head diameter 6.0 mm  
 Pitch 1.25 mm  
 Hex width 2.5 mm  
 Material: steel or titanium alloy



Spiral drill: 99010-25195 (3 faceted)  
 99020-25180 (quick coupling)  
 Tap drill: 99100-01005 (quick coupling)  
 Screwdriver: 99160-25120

L	Cat. No steel	Cat. No titanium alloy
8 mm	11010-35008	31010-35008
10 mm	11010-35010	31010-35010
12 mm	11010-35012	31010-35012
14 mm	11010-35014	31010-35014
16 mm	11010-35016	31010-35016
18 mm	11010-35018	31010-35018
20 mm	11010-35020	31010-35020
22 mm	11010-35022	31010-35022
24 mm	11010-35024	31010-35024
26 mm	11010-35026	31010-35026
28 mm	11010-35028	31010-35028
30 mm	11010-35030	31010-35030
32 mm	11010-35032	31010-35032
34 mm	11010-35034	31010-35034
36 mm	11010-35036	31010-35036
38 mm	11010-35038	31010-35038
40 mm	11010-35040	31010-35040
42 mm	11010-35042	31010-35042
44 mm	11010-35044	31010-35044
45 mm	11010-35045	31010-35045
46 mm	11010-35046	31010-35046
48 mm	11010-35048	31010-35048
50 mm	11010-35050	31010-35050
55 mm	11010-35055	31010-35055
60 mm	11010-35060	31010-35060
65 mm	11010-35065	31010-35065
70 mm	11010-35070	31010-35070

Medimetal

## Cannulated screws

### Cortical screw 3.5 mm, self-tapping cannulated

Thread diameter	3.5 mm
Core diameter	2.4 mm
Head diameter	5.0 mm
Pitch	1.25 mm
Hex width	2.5 mm
Cannulation	1.2 mm
Material:	steel or titanium alloy



Spiral drill:	99030-26095 (3 faceted)
Tap drill:	99100-01005 (quick coupling)
Screwdriver:	99170-25120

L	Cat. No steel	Cat. No titanium alloy
6 mm	11510-35006	31510-35006
7 mm	11510-35007	31510-35007
8 mm	11510-35008	31510-35008
10 mm	11510-35010	31510-35010
12 mm	11510-35012	31510-35012
14 mm	11510-35014	31510-35014
16 mm	11510-35016	31510-35016
18 mm	11510-35018	31510-35018
20 mm	11510-35020	31510-35020
22 mm	11510-35022	31510-35022
24 mm	11510-35024	31510-35024
26 mm	11510-35026	31510-35026
28 mm	11510-35028	31510-35028
30 mm	11510-35030	31510-35030
32 mm	11510-35032	31510-35032
34 mm	11510-35034	31510-35034
36 mm	11510-35036	31510-35036
38 mm	11510-35038	31510-35038
40 mm	11510-35040	31510-35040
42 mm	11510-35042	31510-35042
44 mm	11510-35044	31510-35044
45 mm	11510-35045	31510-35045
46 mm	11510-35046	31510-35046
48 mm	11510-35048	31510-35048
50 mm	11510-35050	31510-35050
52 mm	11510-35052	31510-35052
54 mm	11510-35054	31510-35054
56 mm	11510-35056	31510-35056
58 mm	11510-35058	31510-35058
60 mm	11510-35060	31510-35060
65 mm	11510-35065	31510-35065
70 mm	11510-35070	31510-35070

## Cannulated screws

### Malleolar screw 4.5 mm, self-tapping cannulated

		<b>L</b>	<b>Thread length</b>	<b>Cat. No steel</b>	<b>Cat. No titanium alloy</b>
		25 mm	12.5 mm	11530-45025	31530-45025
Thread diameter	4.5 mm	30 mm	15.0 mm	11530-45030	31530-45030
Core diameter	3.0 mm	35 mm	17.5 mm	11530-45035	31530-45035
Head diameter	8.0 mm	40 mm	20.0 mm	11530-45040	31530-45040
Pitch	1.75 mm	45 mm	22.5 mm	11530-45045	31530-45045
Hex width	3.5 mm	45 mm	19.0 mm	11531-45045	31531-45045
Cannulation	1.2 mm	50 mm	25.0 mm	11530-45050	31530-45050
Material: steel or titanium alloy		50 mm	21.5 mm	11531-45050	31531-45050
		55 mm	27.5 mm	11530-45055	31530-45055
		60 mm	30.0 mm	11530-45060	31530-45060
		65 mm	32.5 mm	11530-45065	31530-45065
		70 mm	35.0 mm	11530-45070	31530-45070
		75 mm	37.5 mm	11530-45075	31530-45075
		80 mm	40.0 mm	11530-45080	31530-45080



Spiral drill: 99030-30095 (3faceted)  
 Tap drill: 99100-01009 (quick coupling)  
 Screwdriver: 99170-35145


Medimetal Ltd

## Cannulated screws

### Cancellous screw 6.5 mm, self-tapping, cannulated

Thread length	A: 16mm; B: 32 mm; C: fully threaded
Thread diameter	6.5 mm
Core diameter	3.4 mm
Head diameter	8.0 mm
Pitch	2.75 mm
Hex width	3.5 mm
Cannulation	2.2 mm

Material: steel or titanium alloy

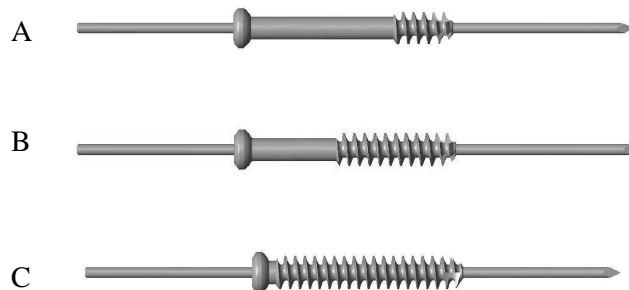

Spiral drill: 99030-35180 (3 faceted)  
Tap drill: 99100-01011 (quick coupling)  
Screwdriver: 99171-35145


**Non self tapping version is also available.**

L	Cat. No					
	A steel	A titanium alloy	B steel	B titanium alloy	C steel	C titanium alloy
14 mm					11561-65014	31561-65014
16 mm					11561-65016	31561-65016
18 mm					11561-65018	31561-65018
20 mm					11561-65020	31561-65020
22 mm					11561-65022	31561-65022
24 mm					11561-65024	31561-65024
25 mm	11581-65025	31581-65025				
26 mm					11561-65026	31561-65026
28 mm					11561-65028	31561-65028
30 mm	11581-65030	31581-65030			11561-65030	31561-65030
35 mm	11581-65035	31581-65035			11561-65035	31561-65035
40 mm	11581-65040	31581-65040	11571-65040	31571-65040	11561-65040	31561-65040
45 mm	11581-65045	31581-65045	11571-65045	31571-65045		
50 mm	11581-65050	31581-65050	11571-65050	31571-65050		
55 mm	11581-65055	31581-65055	11571-65055	31571-65055		
60 mm	11581-65060	31581-65060	11571-65060	31571-65060		
65 mm	11581-65065	31581-65065	11571-65065	31571-65065		
70 mm	11581-65070	31581-65070	11571-65070	31571-65070		
75 mm	11581-65075	31581-65075	11571-65075	31571-65075		
80 mm	11581-65080	31581-65080	11571-65080	31571-65080		
85 mm	11581-65085	31581-65085	11571-65085	31571-65085		
90 mm	11581-65090	31581-65090	11571-65090	31571-65090		
95 mm	11581-65095	31581-65095	11571-65095	31571-65095		
100 mm	11581-65100	31581-65100	11571-65100	31571-65100		
105 mm	11581-65105	31581-65105	11571-65105	31571-65105		
110 mm	11581-65110	31581-65110	11571-65110	31571-65110		
115 mm	11581-65115	31581-65115	11571-65115	31571-65115		
120 mm	11581-65120	31581-65120	11571-65120	31571-65120		
125 mm	11581-65125	31581-65125	11571-65125	31571-65125		
130 mm	11581-65130	31581-65130				

## Solid screws

Cortical screw 4.5 mm,  
self-tapping

Thread diameter	4.5 mm
Core diameter	3.0 mm
Head diameter	8.0 mm
Pitch	1.75 mm
Hex width	3.5 mm
Material:	steel or titanium alloy



Spiral drill:	99010-32180 (3 faceted)
	99020-32195 (quick coupling)
Tap drill:	99100-01009 (quick coupling)
Screwdriver:	99160-35145

L	Cat. No steel	Cat. No titanium alloy
12 mm	11020-45012	31020-45012
14 mm	11020-45014	31020-45014
16 mm	11020-45016	31020-45016
18 mm	11020-45018	31020-45018
20 mm	11020-45020	31020-45020
22 mm	11020-45022	31020-45022
24 mm	11020-45024	31020-45024
26 mm	11020-45026	31020-45026
28 mm	11020-45028	31020-45028
30 mm	11020-45030	31020-45030
32 mm	11020-45032	31020-45032
34 mm	11020-45034	31020-45034
36 mm	11020-45036	31020-45036
38 mm	11020-45038	31020-45038
40 mm	11020-45040	31020-45040
42 mm	11020-45042	31020-45042
44 mm	11020-45044	31020-45044
46 mm	11020-45046	31020-45046
48 mm	11020-45048	31020-45048
50 mm	11020-45050	31020-45050
52 mm	11020-45052	31020-45052
54 mm	11020-45054	31020-45054
56 mm	11020-45056	31020-45056
58 mm	11020-45058	31020-45058
60 mm	11020-45060	31020-45060
65 mm	11020-45065	31020-45065
70 mm	11020-45070	31020-45070
75 mm	11020-45075	31020-45075
80 mm	11020-45080	31020-45080
85 mm	11020-45085	31020-45085
90 mm	11020-45090	31020-45090
95 mm	11020-45095	31020-45095
100 mm	11020-45100	31020-45100
105 mm	11020-45105	31020-45105
110 mm	11020-45110	31020-45110

## Solid screws

### Malleolar screw 4.5 mm, self-tapping

Thread dia meter	4.5 mm
Core diameter	3.0 mm
Head diameter	8.0 mm
Pitch	1.75 mm
Hex width	3.5 mm
Material:	steel or titanium alloy



Spiral drill:	99010-32180 (3faceted) 99020-32195 (quick coupling)
Tap drill:	99100-01009 (quick coupling)
Screwdriver:	99160-35145

L	Thread length	Cat. No steel	Cat. No titanium alloy
25 mm	12.5 mm	11030-45025	31030-45025
30 mm	15.0 mm	11030-45030	31030-45030
35 mm	17.5 mm	11030-45035	31030-45035
40 mm	20.0 mm	11030-45040	31030-45040
45 mm	22.5 mm	11030-45045	31030-45045
50 mm	25.0 mm	11030-45050	31030-45050
55 mm	27.5 mm	11030-45055	31030-45055
60 mm	30.0 mm	11030-45060	31030-45060
65 mm	32.5 mm	11030-45065	31030-45065
70 mm	35.0 mm	11030-45070	31030-45070
75 mm	37.5 mm	11030-45075	31030-45075
80 mm	40.0 mm	11030-45080	31030-45080


Medimetal Ltd.



## Solid screws

### Cancellous screw 4.0 mm, self-tapping

Thread diameter	4.0 mm
Core diameter	1.9 mm
Head diameter	6.0 mm
Pitch	1.75 mm
Hex width	2.5 mm
Material:	steel or titanium alloy

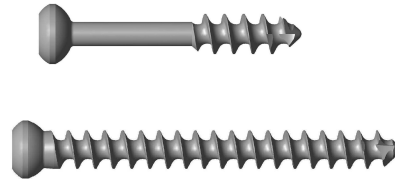


Spiral drill:	99010-20115 (3 faceted) 99020-20125 (quick coupling)
Tap drill:	99100-01007 (quick coupling)
Screwdriver:	99160-25120

Non self tapping version is also available.

L	Cat. No steel		Cat. No titanium alloy		Thread length
	fully threaded	short	fully threaded	short	
10 mm	11041-40010	11051-40010	31041-40010	31051-40010	5
12 mm	11041-40012	11051-40012	31041-40012	31051-40012	5
14 mm	11041-40014	11051-40014	31041-40014	31051-40014	5
16 mm	11041-40016	11051-40016	31041-40016	31051-40016	6
18 mm	11041-40018	11051-40018	31041-40018	31051-40018	7
20 mm	11041-40020	11051-40020	31041-40020	31051-40020	8
22 mm	11041-40022	11051-40022	31041-40022	31051-40022	9
24 mm	11041-40024	11051-40024	31041-40024	31051-40024	10
26 mm	11041-40026	11051-40026	31041-40026	31051-40026	12
28 mm	11041-40028	11051-40028	31041-40028	31051-40028	14
30 mm	11041-40030	11051-40030	31041-40030	31051-40030	14
32 mm	11041-40032	11051-40032	31041-40032	31051-40032	14
35 mm	11041-40035	11051-40035	31041-40035	31051-40035	14
36 mm	11041-40036	11051-40036	31041-40036	31051-40036	14
40 mm	11041-40040	11051-40040	31041-40040	31051-40040	14
45 mm	11041-40045	11051-40045	31041-40045	31051-40045	15
50 mm	11041-40050	11051-40050	31041-40050	31051-40050	15
55 mm	11041-40055	11051-40055	31041-40055	31051-40055	15
60 mm	11041-40060	11051-40060	31041-40060	31051-40060	15
65 mm	11041-40065	11051-40065	31041-40065	31051-40065	15
70 mm	11041-40070	11051-40070	31041-40070	31051-40070	15

Cancellous screw 6.5 mm, self-tapping

Thread length           A: 16mm; B: 32 mm;  
                                   C: fully threaded  
 Thread diameter        6.5 mm  
 Core diameter          3.0 mm  
 Head diameter         8.0 mm  
 Pitch                    2.75 mm  
 Hex width               3.5 mm

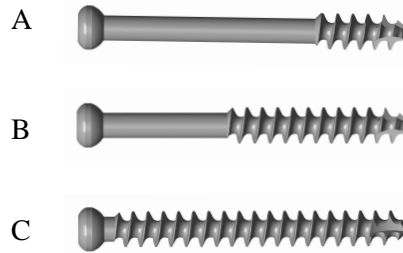

Material: steel or titanium alloy  
**For titanium alloy the first digit of Cat. No will change to 3.**

Spiral drill:            99010-32220 (3 faceted)  
                                   99020-32195 (quick coupling)  
 Tap drill:              99100-01011 (quick coupling)  
 Screwdriver:          99160-35145


**Non self tapping version is also available.**

L	Cat. No steel		
	A	B	C
14 mm			11061-65014
16 mm			11061-65016
18 mm			11061-65018
20 mm			11061-65020
22 mm			11061-65022
24 mm			11061-65024
25 mm	11081-65025		11061-65025
30 mm	11081-65030		11061-65030
35 mm	11081-65035		11061-65035
40 mm	11081-65040	11071-65040	11061-65040
45 mm	11081-65045	11071-65045	11061-65045
50 mm	11081-65050	11071-65050	11061-65050
55 mm	11081-65055	11071-65055	11061-65055
60 mm	11081-65060	11071-65060	11061-65060
65 mm	11081-65065	11071-65065	11061-65065
70 mm	11081-65070	11071-65070	11061-65070
75 mm	11081-65075	11071-65075	11061-65075
80 mm	11081-65080	11071-65080	11061-65080
85 mm	11081-65085	11071-65085	11061-65085
90 mm	11081-65090	11071-65090	11061-65090
95 mm	11081-65095	11071-65095	11061-65095
100 mm	11081-65100	11071-65100	11061-65100
105 mm	11081-65105	11071-65105	11061-65105
110 mm	11081-65110	11071-65110	11061-65110
115 mm	11081-65115	11071-65115	11061-65115
120 mm	11081-65120	11071-65120	11061-65120
125 mm	11081-65125	11071-65125	
130 mm	11081-65130	11071-65130	
135 mm		11071-65135	

## Cannulated screws

### Cortical screw 4.5 mm, self-tapping, cannulated

Thread diameter	4.5 mm
Core diameter	3.0 mm
Head diameter	8.0 mm
Pitch	1.75 mm
Hex width	3.5 mm
Cannulation:	1.2 mm
Material:	steel or titanium alloy




Spiral drill:	99030-30095 (3 faceted)
Tap drill:	99100-01009 (quick coupling)
Screwdriver:	99170-35145

L	Cat. No steel	Cat. No titanium alloy
12 mm	11520-45012	31520-45012
14 mm	11520-45014	31520-45014
16 mm	11520-45016	31520-45016
18 mm	11520-45018	31520-45018
20 mm	11520-45020	31520-45020
22 mm	11520-45022	31520-45022
24 mm	11520-45024	31520-45024
26 mm	11520-45026	31520-45026
28 mm	11520-45028	31520-45028
30 mm	11520-45030	31520-45030
32 mm	11520-45032	31520-45032
34 mm	11520-45034	31520-45034
36 mm	11520-45036	31520-45036
38 mm	11520-45038	31520-45038
40 mm	11520-45040	31520-45040
42 mm	11520-45042	31520-45042
44 mm	11520-45044	31520-45044
46 mm	11520-45046	31520-45046
48 mm	11520-45048	31520-45048
50 mm	11520-45050	31520-45050
52 mm	11520-45052	31520-45052
54 mm	11520-45054	31520-45054
56 mm	11520-45056	31520-45056
58 mm	11520-45058	31520-45058
60 mm	11520-45060	31520-45060
65 mm	11520-45065	31520-45065
70 mm	11520-45070	31520-45070

Medimetric

Cancellous screw 4.0 mm, self-tapping cannulated

Thread diameter 4.0 mm  
 Core diameter 2.2 mm  
 Head diameter 6.0 mm  
 Pitch 1.75 mm  
 Hex width 2.5 mm  
 Cannulation 1.2 mm  
 Material: steel or titanium alloy

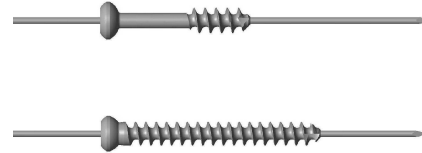


Spiral drill: 99030-26095 (3 faceted)  
 Tap drill: 99100-01007 (quick coupling)  
 Screwdriver: 99170-25120

Non self tapping version is also available.

L	Cat. No steel		Cat. No titanium alloy		Thread L
	fully threaded	short	fully threaded	short	
10 mm	11541-40010	11551-40010	31541-40010	31551-40010	5
12 mm	11541-40012	11551-40012	31541-40012	31551-40012	5
14 mm	11541-40014	11551-40014	31541-40014	31551-40014	5
16 mm	11541-40016	11551-40016	31541-40016	31551-40016	6
18 mm	11541-40018	11551-40018	31541-40018	31551-40018	7
20 mm	11541-40020	11551-40020	31541-40020	31551-40020	8
22 mm	11541-40022	11551-40022	31541-40022	31551-40022	9
24 mm	11541-40024	11551-40024	31541-40024	31551-40024	10
26 mm	11541-40026	11551-40026	31541-40026	31551-40026	12
28 mm	11541-40028	11551-40028	31541-40028	31551-40028	14
30 mm	11541-40030	11551-40030	31541-40030	31551-40030	14
32.5 mm	11541-40032	11551-40032	31541-40032	31551-40032	14
35 mm	11541-40035	11551-40035	31541-40035	31551-40035	14
37.5 mm	11541-40037		31541-40037		14
40 mm	11541-40040	11551-40040	31541-40040	31551-40040	14
42.5 mm	11541-40042		31541-40042		14
45 mm	11541-40045	11551-40045	31541-40045	31551-40045	15
50 mm	11541-40050	11551-40050	31541-40050	31551-40050	15
55 mm	11541-40055	11551-40055	31541-40055	31551-40055	15
60 mm	11541-40060	11551-40060	31541-40060	31551-40060	15
65 mm	11541-40065		31541-40065		15
70 mm	11541-40070		31541-40070		15

Cancellous screw 7 mm, self-tapping - cannulated

Thread length                    A: 16 mm B: 32 mm;  
 Thread diameter                7 mm  
 Core diameter                    3.9 mm  
 Head diameter                   8.0 mm  
 Pitch                                2.75 mm  
 Hex width                         3.5 mm  
 Cannulation                      2.2 mm  
 Material: steel or titanium alloy

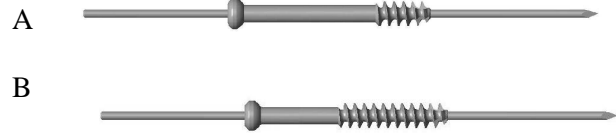

Spiral drill:                    99030-32180 (3faceted)  
 Screwdriver:                 99171-35145

L	A		B	
	steel	titanium alloy	steel	titanium alloy
25 mm	11600-70025	31600-70025		
30 mm	11600-70030	31600-70030		
35 mm	11600-70035	31600-70035		
40 mm	11600-70040	31600-70040	11590-70040	31590-70040
45 mm	11600-70045	31600-70045	11590-70045	31590-70045
50 mm	11600-70050	31600-70050	11590-70050	31590-70050
55 mm	11600-70055	31600-70055	11590-70055	31590-70055
60 mm	11600-70060	31600-70060	11590-70060	31590-70060
65 mm	11600-70065	31600-70065	11590-70065	31590-70065
70 mm	11600-70070	31600-70070	11590-70070	31590-70070
75 mm	11600-70075	31600-70075	11590-70075	31590-70075
80 mm	11600-70080	31600-70080	11590-70080	31590-70080
85 mm	11600-70085	31600-70085	11590-70085	31590-70085
90 mm	11600-70090	31600-70090	11590-70090	31590-70090
95 mm	11600-70095	31600-70095	11590-70095	31590-70095
100 mm	11600-70100	31600-70100	11590-70100	31590-70100
105 mm	11600-70105	31600-70105	11590-70105	31590-70105
110 mm	11600-70110	31600-70110	11590-70110	31590-70110
115 mm	11600-70115	31600-70115	11590-70115	31590-70115
120 mm	11600-70120	31600-70120	11590-70120	31590-70120
125 mm	11600-70125	31600-70125	11590-70125	31590-70125
130 mm	11600-70130	31600-70130	11590-70130	31590-70130